

VS1200 & VS1000

Vertical Scanners



Ideal for:

- Designed for POS applications such as grocery, drug, variety and convenience stores
- Compact size saves counter space and eases installation

Additional features:

- Programmable sleep mode saves power and extends scanner life
- Peripheral port for undecoded handheld scanner (VS1200)
- Dense scan pattern improves reading of highly truncated bar codes (presentation models)
- Optional EAS antenna for one step scanning and security tag deactivation
- Standard, short range depth-of-field configuration available to avoid accidental reads in small checkout environments (VS1000 presentation)
- Optional enhanced depth-of-field 18 cm / 7" reads high density codes (VS1000 presentation)
- Power off the terminal

Great Performance Without Compromise.

Maximum Productivity Wherever Vertical Scanning Is Required

When choosing a vertical scanner for your retail application, you can't afford to settle for the limitations of a "one size fits all" solution. That's why the VS1200 & VS1000 scanners from PSC are designed specifically to optimize performance in vertical applications.

Unlike many other so-called vertical scanners which are little more than horizontal scanners turned on their sides, the competitively priced VS1200 and VS1000 are "true vertical" scanners. Aggressive, fast, and accurate each has a large, symmetrical scan volume with a generous "sweet spot" to maximize productivity and ergonomics.

All VS models boast a small footprint and are easily installed onto any countertop with a simple stationary or flexible stand mount.

Models For The Codes You Read...

The VS1200 and the VS1000 are each available in two formats. To select the VS scanner that's right for your application, first determine the codes that you will need to read in your environment.

The VS1200 comes standard with UPC/EAN/JAN decoding and advanced Edge™ software for reading torn or disfigured labels. With Edge disabled, the VS1200 reads the UPC family plus one additional industrial code, and reads poorly-printed labels with the help of Adaptive™ software. Optionally, the VS1200 can be ordered with P2/P5 add-ons. Adaptive software is standard on the VS1000, which auto-discriminates between up to four codes including UPC/EAN/JAN with P2/P5 add-ons, and industrial symbologies such as ITF, Code 128, and Code 39.


...And How You Read Them

Examine your scanning environment—the VS model you choose will depend on available counter space, the method used to scan items, and the rate at which items must be scanned.

Both the VS1200 and the VS1000 are available in "Sweep" and "Presentation-style" scanning models. In higher volume checkout environments with sufficient room for a left-to-right or right-to-left scanning motion, choose a sweep configuration. In lower volume scanning environments with limited counter space, the presentation configurations' deep, dense scan pattern will provide optimal performance.

The VS1200 & VS1000: Optimized For Your Application

Your scanning requirements are unique, and your scanner should be too. With the VS1200 & VS1000, you can have an affordable vertical scanner that's just right for your environment—without sacrificing performance, ergonomics or valuable counter space.

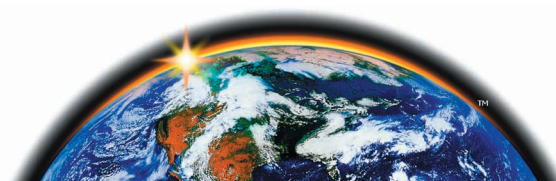

Specifications

VS1200 & VS1000

PRODUCT

Mechanical

Height: 15.2 cm / 6.0"
 Width: 16.5 cm / 6.5"
 Depth: 10.8 cm / 4.3"
 Weight: 1.6 g / 3.5 lbs.

Optical

Sweep

Scan lines: 18
 Rate: 1,350 scans/sec.
 Depth-of-field: 20.5 cm / 8.0"
 Read height: 15.2 cm / 6.0"

Presentation

Scan lines: 20
 Rate: 1,500 scans/sec.
 Depth-of-field:
 18.0 cm / 7.0" (VS1000 enhanced);
 12.8 cm / 5.0" (VS1000 standard & VS1200)
 Read height: 11.5 cm / 4.5"

Environmental

Temperature rating

Operating: 10° to 40° C / 50° to 104° F
 Storage: -40° to 70° C / -40° to 158° F
 Humidity: 5 to 95% NC

Electrical

AC Power requirements

100-250 VAC, 50-60 Hz; 6.4 Watts (nominal),
 9.7 Watts (maximum), 4.4 Watts (sleep mode)

Decoding Capability

The VS1200 reads the UPC code family with Edge™ decoding software. When the VS1200 is programmed to read one additional industrial code, Adaptive™ decoding software replaced Edge.

The VS1000 reads up to three industrial codes in addition to the UPC code family, and uses Adaptive decoding software.

UPC A, E / EAN 8,13 / JAN 8, 13

- with Edge (VS1200 only)
- with P2/P5 add-ons (standard on VS1000 – excluding IBM I/Fs; optional on VS1200)

Industrial Codes

- Code 128
- Code 39 with Stitching (VS1000 only)
- ITF (Interleaved 2 of 5)
- MSI / Plessey (VS1000 only)

Communications

VS1200

IBM 468x / 469x; OCIA (PSC & NCR); OCIA / RS232 (dual interface cable); RS232; 6-bit; Multidrop (MDL); Keyboard Wedge; peripheral port for undecoded scanner

VS1000

IBM 468x / 469x; OCIA (PSC & NCR); RS232; 6-bit; Wand Emulation; Keyboard Wedge

Safety and Regulatory

Electrical: AS 3260 (Australia); EN60 950 (TÜV Europe); Korea Agency; MITI T-Mark (Japan); DEMKO (Denmark); FIMKO (Finland); NEMKO (Norway); SEMKO (Sweden); UL 1950 (USA); cUL C22.2 No. 950-M89 (Canada)

Emissions: FCC part 15 subpart j, Class A (USA); AS/NZS 3548 (Australia/New Zealand); VCCI-1 (Japan); VDE Class B, EN 55022-B (Europe)

Laser classification: CDRH Class IIa (USA);



(CAUTION: Laser Radiation – do not stare into beam); IEC 60825 Class 1 (Europe)

Other

EAS compatibility

The optional integrated antenna works with Checkpoint Counterpoint IV, V and subsequent models (available from Checkpoint Systems).

Available Mount Options



P/N: 10-0924
 Standard
 (included w/scanner)



P/N: 7-0129
 Wall Tilt



P/N: 7-0149
 Riser



P/N: 7-0163
 Panavise



Corporate Headquarters

PSC Inc.
 959 Terry Street
 Eugene OR 97402-9150 USA
 Tel: 800 695 5700 or 541 683 5700
 Fax: 541 345 7140

PSC Worldwide Sales and Service locations

European Headquarters
 Europe/Middle East/Africa
 PSC Bar Code Limited
 Axis 3, Rhodes Way
 Watford, England WD24 4TR
 Tel: 44 1923 809500
 Fax: 44 1923 809505

Belgium
 Tel: 32 2 414 74 09
 Fax: 32 2 410 11 63
 Sweden
 Tel: 46 4010 84 92
 Fax: 46 4010 84 91

France
 Tel: 33 1 64 86 71 00
 Fax: 33 1 64 46 72 44
 Turkey
 Tel: 90 212 236 91 15
 Fax: 90 212 236 91 16

Germany
 Tel: 49 6151 93580
 Fax: 49 6151 935858

Italy
 Tel: 39 0 39 629031
 Fax: 39 0 39 6859496

Spain
 Tel: 34 91 203 65 00
 Fax: 34 91 203 65 01

Asia Pacific Headquarters
 PSC Hong Kong
 12 Harcourt Road
 Bank of America Tower 8th Floor
 Hong Kong
 Tel: 852 2 584 6210
 Fax: 852 2 521 0291

Australian Headquarters
 PSC Asia Pacific Pty Ltd
 6-10 Talavera Road
 Suite G 1
 North Hyde NSW 2113
 Tel: 61 2 9878 8999
 Fax: 61 2 9878 8688

Japanese Headquarters
 PSC Japan KK
 9F Gotanda Daiwa Bldg
 7-13-5 Nishigotanda
 Shinagawa-Ku, Tokyo 141-0031
 Tel: 81 3 3491 6761
 Fax: 81 3 3491 6656

Latin American Headquarters
 PSC Latin America
 1110 Brickell Avenue
 Suite 505
 Miami FL 33131 USA
 Tel: 1 305 539-0111
 Fax: 1 305 539-0206

Specifications are subject to change without notice.

Additional information concerning this product or other PSC products and services can be found at the PSC website: www.pscnet.com;

or contact your PSC representative for more information.

